

M-2530 SLIPFORMING SYSTEM



RELY ON A MILLER TO GET THE JOB DONE

Miller Formless Company
1805 Dot Sreet
McHenry, IL 60050

office 815-385-7700
fax 815-385-2494
www.millerformless.com

M-2530 SLIPFORMING SYSTEM



Features and Benefits

- Transport width is < 2.5 m without disassembly
- Numerous different movements for maximum utilization
- Right or left hand operation standard
- Excellent 360° operator visibility, Center mounted console for easy access to all paving functions
- Possibility to work 40 cm under track-surface
- Adaptable for 3D Total-Station guiding system
- If paving width is set at 2 m, total machine width is 3,10 m; if paving width is set at 1.50 m the total machine width becomes 2,60 m
- Special track design provides zero clearance protection from damage for hydraulic motors and hoses
- You can pave concrete at a speed of 4,5 m/min
- European Support Organization for Parts and Service




1. The profile insert is in place and ready to pave.



2. The profile insert is being removed from the mold.



3. The mold is open; the profile insert has been removed and is ready for a new profile.

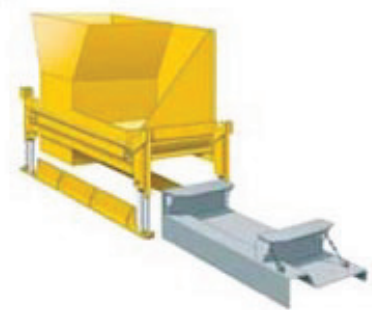

RELY ON A MILLER TO GET THE JOB DONE